YouTube

CONTINENTAL 416 JOY

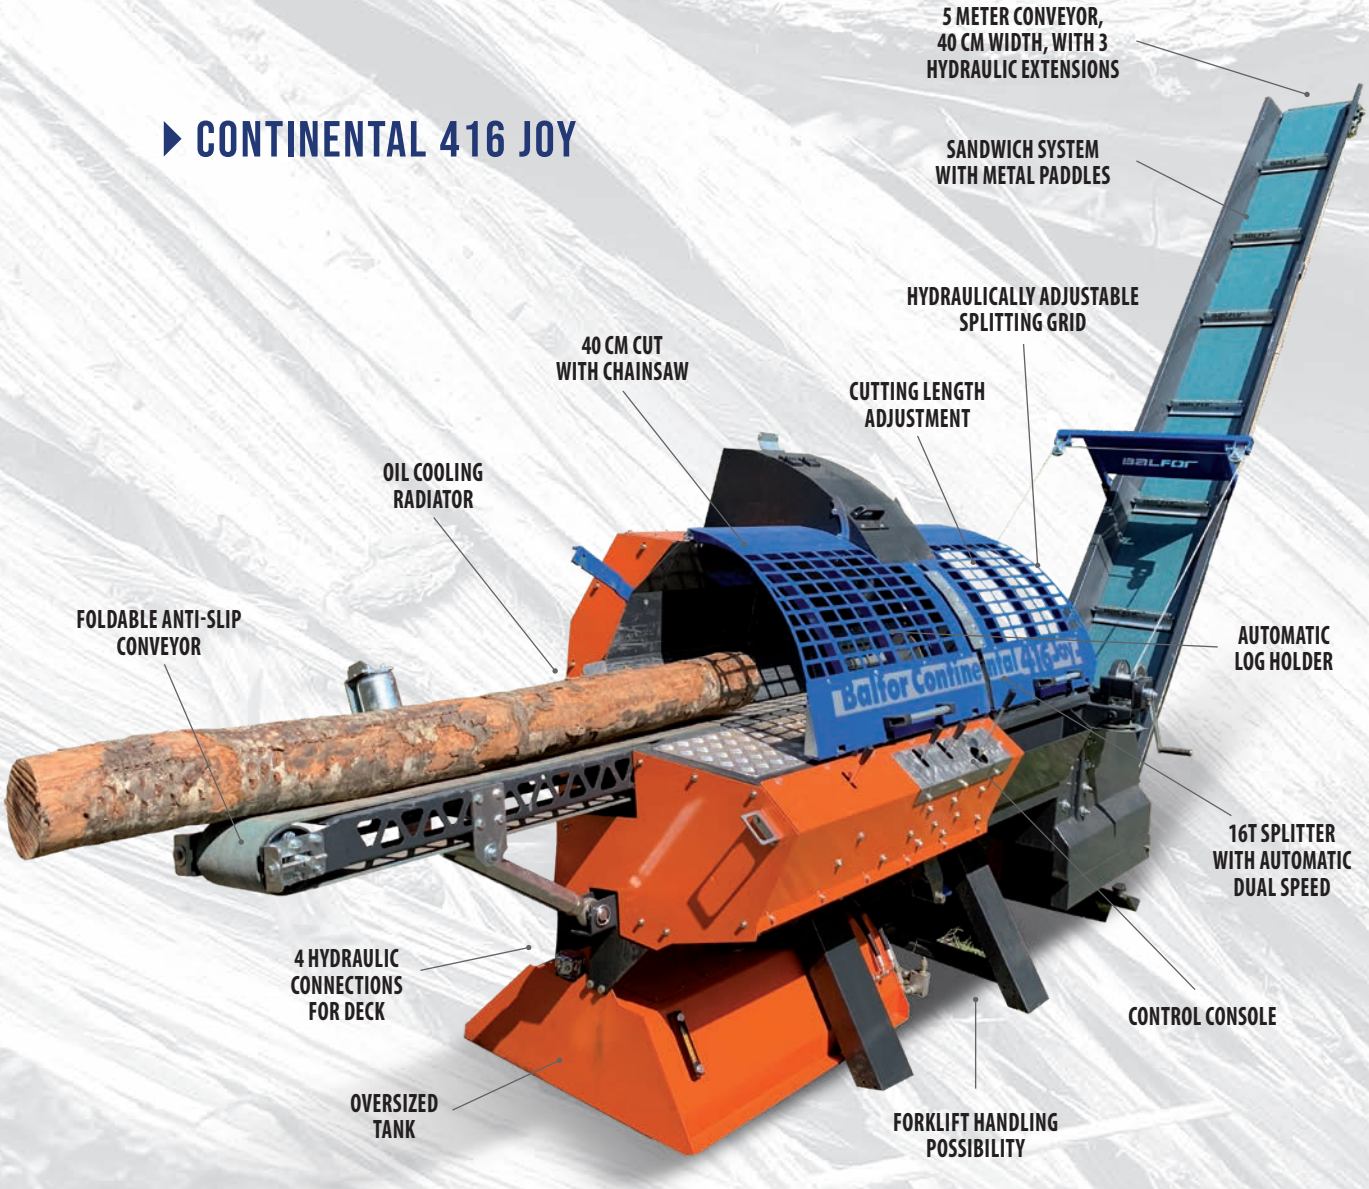

CONTINENTAL 416 is a high-productivity firewood processor. Thanks to the 400 mm cutting capacity guaranteed by the powerful hydraulic chainsaw and the 16-ton splitting force, this processor can work even on hard and knotty wood. The operator controls are hydraulic and the hydraulic wedge made of DOMEX® material allows splitting your logs by centering them perfectly, avoiding waste or asymmetrical splits. The supplied splitting wedges are 3 (2/4 - 6 - 8). Continental 416 is equipped with an oversized tank, cooling radiator, several compartments for storing tools or the oil can. It is also equipped with a 3-extension hydraulic conveyor and hydraulic connections for the use of a chain conveyor.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		TON	cm	cm	m	KG	cm	LITERS OIL	HP
41394	CONTINENTAL 416 C JOY Tractor PTO	16	60	40	5m/40cm	1300	300x150x240	140	40
47023	CONTINENTAL 416 ET JOY 380 Volt - 32A	16	60	40	5m/40cm	1300	300x150x240	140	15
41498	CONTINENTAL 416 SB JOY ROAD Benzina/Petrol	16	60	40	5m/40cm	1300	300x200x250	140	35

PARTNERS

OPTIONALS

CONTINENTAL 416 JOY

CLT0031	12 way wedge

INCLUDED

OPTIONALS

YouTube

CONTINENTAL 480 SPECIAL

CONTINENTAL 480 is the bigger sister of the smaller Continental 416 with additional features. In addition to what is described for the 416, it offers a multifunction electric joystick, a 48 cm cutting capacity, a 22-ton log splitter and a conveyor that can rotate to the right and left. The supplied splitting wedge is the 2/4-way but as an option we offer the 6, 8 or 12-way wedges. A truly high-performance and absolutely complete machine for the most demanding operators who want to maximize production.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		TON	cm	cm	m	KG	cm	LITERS	HP
41905	CONTINENTAL 480 C Special Tractor PTO	22	55	48	5m/43cm	1600	170x260x250	100	80

PARTNERS

OPTIONALS

CONTINENTAL 480

OPCONT2	2/6 way wedge
OPCONT2	8 way wedge
OPCONT2	12 way wedge

OPCONT4	POWER PTO 15 KW-63A (Continental 480)

INCLUDED

OPTIONALS

YouTube

DOUBLE MOBILE SPLITTING GRID ON 2 AXES

50 TON SPLITTER WITH AUTOMATIC DUAL SPEED AND ADJUSTABLE STROKE

DOUBLE COOLING RADIATOR

LIGHTS FOR NIGHT WORK

6 METER CONVEYOR, 100 CM WIDTH, WITH 3 HYDRAULIC EXTENSIONS

70 CM CUT WITH CHAINSAW

CONTROL CONSOLE WITH JOYSTICK

3-METER DECK WITH THREE CHAINS FOR LOGS UP TO 5 METERS LONG

CYLINDER FOR DECK CLOSING

MOTORIZED ROLLER CONVEYOR FOR LOG FEEDING

TRACTOR PTO

HYDRAULIC STABILIZER

500 LITER TANK

REINFORCED WHEELS FOR TRANSPORT

WORKING PLATFORM

CONTINENTAL 750 C ROAD

CONTINENTAL 750 positions itself among the largest high-productivity processors on the market. With a 70 cm log passage diameter and a 50-ton splitting force, it is capable of performing in all situations. The **CONTINENTAL 750** is equipped with high-capacity wheels and a drawbar with hydraulic foot in order to be easily moved within the worksite. Standard features include the 3-chain infeed table for advancing logs, work light for low-visibility conditions, roller table with all rollers motorized, double mobile splitting grid 18 and 28 pieces, and a conveyor belt 100 cm wide and 6 meters long with hydraulic inclination. The operator works on an elevated platform and can control all machine functions. Required power: 90 HP tractor. The **CONTINENTAL 750** can easily be considered the most productive and effective in its category.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		TON	cm	cm	m	KG	cm	LITERS OIL	HP
31779	CONTINENTAL 750 C ROAD Tractor PTO	50	65	70	6m/100cm	9000	570x245x350	500	90
31781	CONTINENTAL 750 ET ROAD Tractor PTO	50	65	70	6m/100cm	9400	570x245x350	500	55

PARTNERS

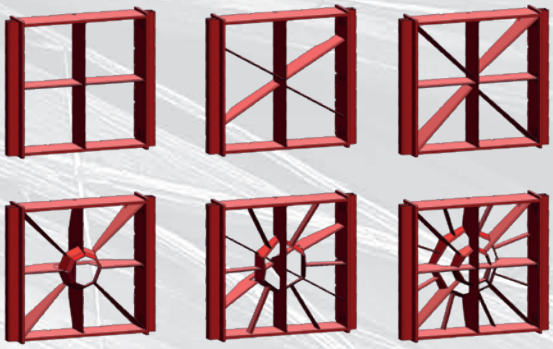

CONTINENTAL 750 ET ROAD

ATTILA

ATTILA was designed to process logs and transform them into firewood quickly with the assistance of a single operator. From the telehandler cab, the operator can carry out all operations from loading the logs to their transformation. The advantage of **Attila** is that, working at height, it can unload the split wood directly onto the trailer or stack it without having to handle it again. Compared to existing machines, **Attila** is equipped with the BOOST system that allows high performance even with low oil flow, as happens with telehandlers which, due to their very long arm, are subject to significant pressure losses. At the end of the cut, the splitter pusher automatically retracts by a few millimeters, distancing the freshly cut log from the chainsaw. This innovative system leaves space for positioning the newly cut log and allows the chainsaw to rise without touching the next log to be cut. **Attila** represents a new, modern, effective and patented technology to make the telehandler even more versatile for biomass production.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

Required hydraulic flow rate	90-130 liters/min
Operating hydraulic pressure	210-260 bar
Splitting force	25 ton
Hydraulic coupling	2x hose 3/4" + 1x hose 3/8" drainage
Electrical connection	12 v with indicator light
Maximum log diameter	550 mm
Maximum log length	3 m
Cut length adjustment	300-650 mm
Available wedges	4-6-8 ways
Weight	1600 kg
Dimensions (LxlxH)	2,3x1,6x1,9 m
Chainsaw bar length	750 mm
Rated chain speed	23-46 m/sec
Lubricating oil tank capacity	11 liters

PARTNERS

INCLUDED

OPTIONALS